


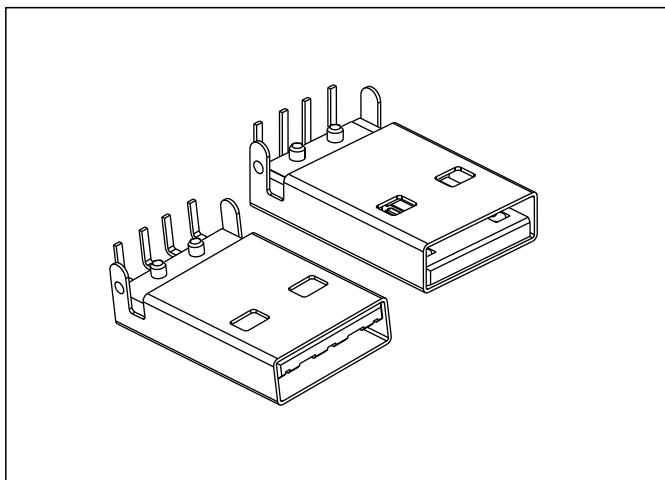


Specifications

Current rating:1.0AAC/DC
Voltage rating:30V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:750V AC for one minute
Operating temperature range:-40°C to +105°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Selective Gold Plated

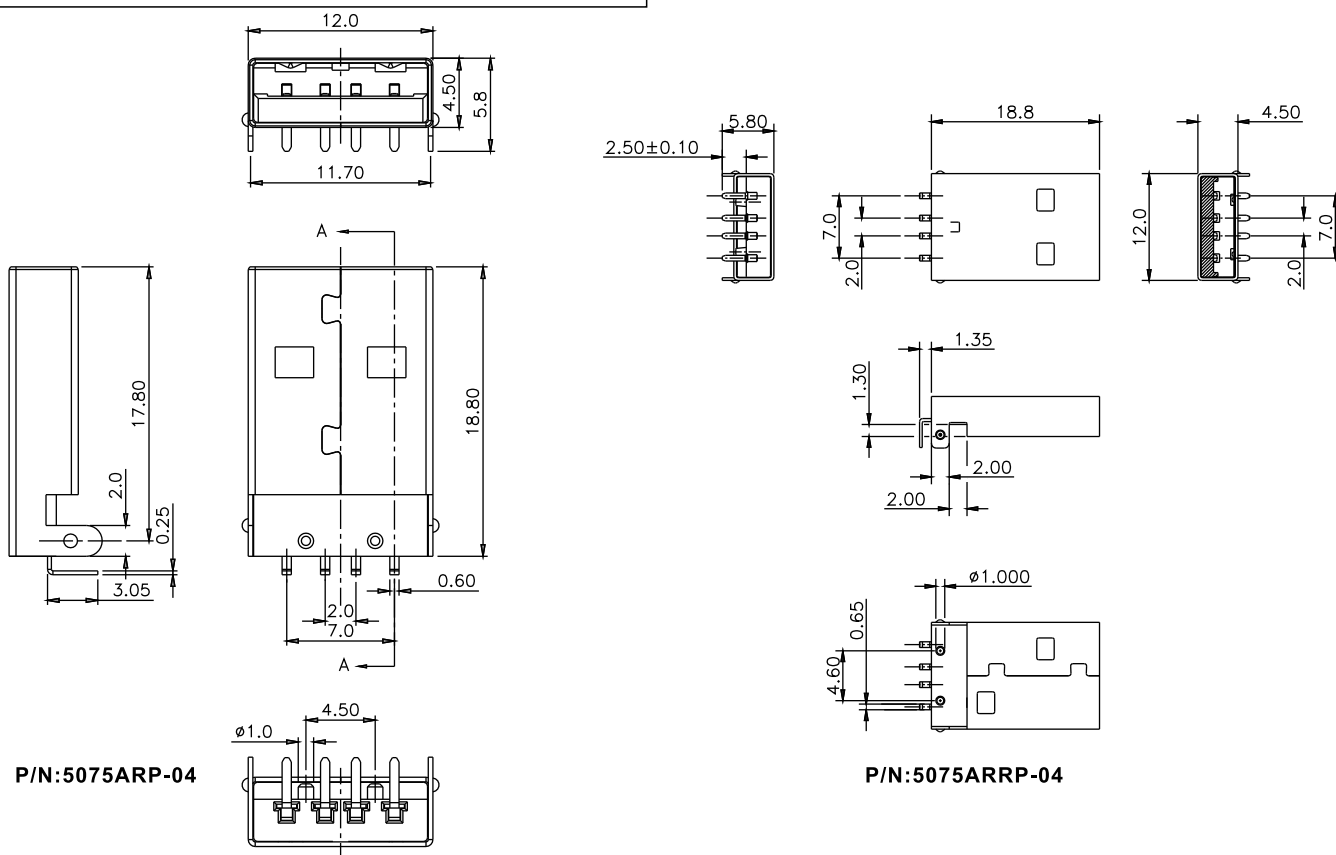


Ordering Information

5075ARP-04

① ②

① ARP:A Type Male ARRP:A Type Male (Reverse)	② No. Of Contacts
--	-------------------

Recommended PCB Layout



Unit:mm