

Specifications

Current rating:1.0AAC/DC

Voltage rating:30V AC/DC

Contact resistance:20m ohm. max.

Insulation resistance:1000M ohm. Min.

Withstanding voltage:750V AC for one minute


Operating temperature range:-40°C to +105°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)


Contact:Copper Alloy

Plating:Selective Gold Plated

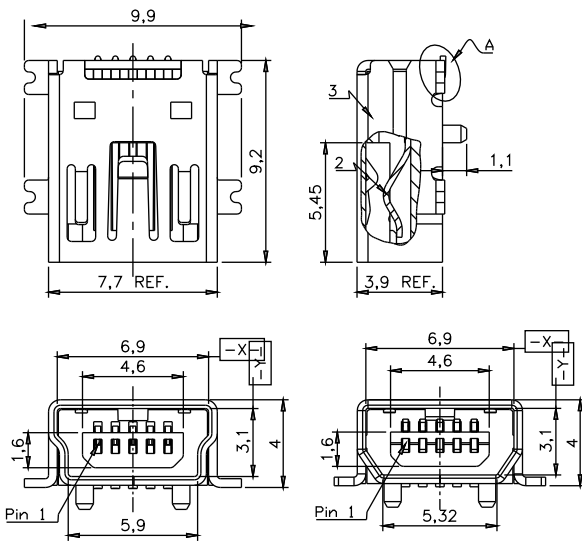



P/N:5075BMR-05-SM

P/N:5075ABMR-05-SM

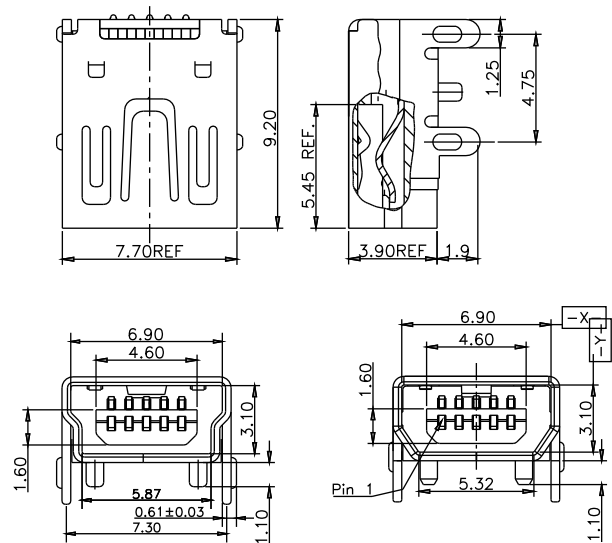

P/N:5075BMR-05-SM1

P/N:5075ABMR-05-SM1




Ordering Information


5075ABMR-05-SMX

① ABMR:Mini AB Type BMR:Mini B Type	② No. Of Contacts	③ SM:SM Type SM1:SM1 Type
--	-------------------	------------------------------

Recommended PCB Layout



SM Type



SM1 Type

Unit:mm