

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG





- Material
①Screws : M4.0 steel, Ni plated
②Terminal : Brass, Tin plated
③Housing : PA66,UL94V-0

- Electrical UL IEC
Rated voltage : 300V 750V
Rated current : 25A 32A
Insulation resistance: 500M Ω /DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 22-12AWG 4.0mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃ $\pm$ 5/5sec
Torque: 1.2N.m (10.53lb.in)

HOW TO ORDER

KF-1000-10.0-XXP-1 X-XXXXX

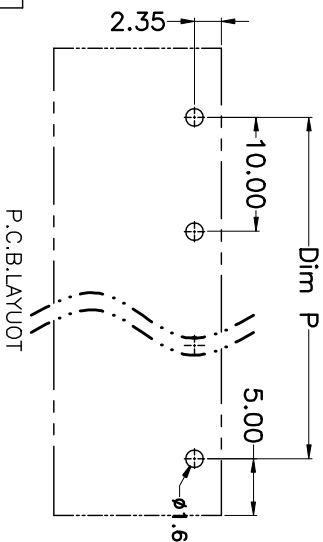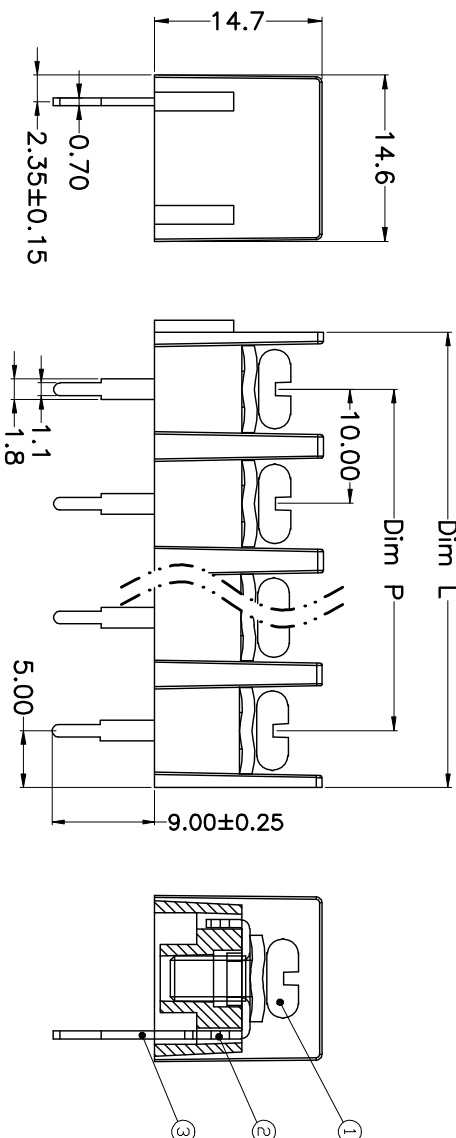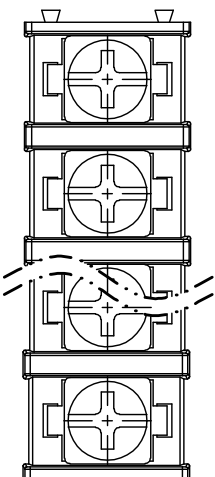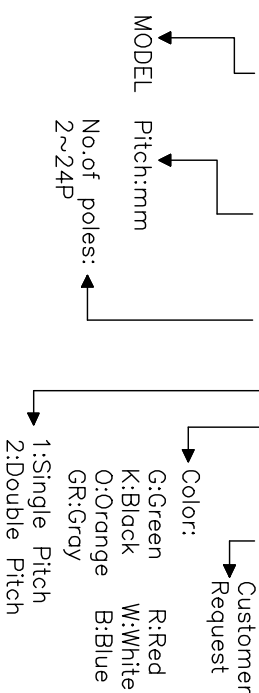

N=Number of Poles
Dim P=(N-1)×10.00
Dim L=N×10.00

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

PROJECTION	TITLE
UNITS mm	KF-1000-10.0-XXP
SHEET SIZE A4	SERIES KF-1000

DF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5 .X ±0.3 .XX ±0.1	X. ±5° .X ±3° .XX ±1°
DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. XP0012016-xxxx	